Q50
User Manual

INTRODUCTION

Thank you for purchasing this Micromax mobile phone. To obtain the best performance of your phone, please read this user manual carefully.

Table of Contents

1 Safety 5

1.1 Safety Precautions 5

2 Introduction 6

2.1 Phone and Accessories 6
2.2 Your Phone 6
2.3 Description of Icons 7
2.4 About SIM Card and the Battery 8
2.5 To switch ON and OFF 9
2.6 USB Cable Functions 9

3 Phonebook 10

3.1 To Add a Contact 10
3.2 To View a Contact 10
3.3 Send a Message to a contact 10
3.4 To Call a contact 10
3.5 To Edit a Contact 10
3.6 To Delete a Contact 10
3.7 To Copy a contact 10
3.8 To Move a contact 10
3.9 To Send a contact 10
3.10 Add to Blacklist 11
3.11 Caller groups 11
3.12 Phonebook Settings 11

4 Calling 11

4.1 To Dial from the Phonebook 11
4.2 To activate 'Mute' during a call 11
4.3 DTMF (Dual Tone MultiFrequency) tone 11
4.4 Call divert 11
4.5 Call waiting 12
4.6 Call Barring 12
4.7 Conference Call 12

5 Call Logs 13

5.1 Missed calls/dialed calls/received calls 13
5.2 Delete call logs 13
5.3 SIM1-2 call timers 13
5.4 SIM1-2 call cost 13

6 Messages 13

6.1 Write SMS 13
6.2 Inbox 14
6.3 Drafts 14
6.4 Outbox 14
6.5 Sent Messages 15

6.6 Archive 15
6.7 Delete Messages 15
6.8 Templates 15
6.9 Message settings 15
6.10 EMAIL 16
6.11 Broadcast Message 17
7 Settings 18
7.1 Customized Phone & Call Settings 18
7.2 Profile Setup 19
7.3 Security Settings 19
8 Entertainment &Multimedia 20
8.1 Camera 20
8.2 Audio Player 20
8.3 FM Radio 20
8.4 Image Viewer 21
8.5 Video Recorder 21
8.6 Video Player 21
8.7 Photo editor 22
8.8 Sound Recorder 22
8.9 Slide show 22
8.10 Fun & Games 22
9 Bluetooth 22
9.1 To Activate/Deactivate Bluetooth Connectivity 23
9.2 Visibility 23
9.3 To Search/Inquire Audio Device 23
9.4 To Search My (new) device 23
9.5 My Name 23
9.6 Advanced 23
10 Organizer & Applications 23
11 File Manager 25
12 WAP Services & JAVA 26
12.1 WAP Browser 26
12.2 WAP Setup 26
12.3 Java 26
13 STK 27
13.1 STK Services 27
14 Inputting Text 27
15 Maintenance 28
16 Taking Care of your Device 29
17 After Services 30

1 Safety

1.1 Safety Precautions

Please read through the following briefings carefully, and act in accordance with these rules, so as to prevent causing any danger or violating any law.

Safe driving

1) Do not use the phone while driving. When you have to use the phone, please use the personal hands-free kit.

2) Please put the phone safely in the phone stand. Do not put it onto any passenger seat or any place from which it may fall down in case of vehicular collision or emergency braking.

Turn off during a flight: Flight is influenced by interference caused by the phone. It is illegal to use a phone on the airplane. Please turn off your phone during a flight.

Turn off the phone when within an area where blasting takes place: Be sure to strictly observe the related laws by turning off the phone when you are within, or in the vicinity of, an area where blasting takes place.

Turn off the phone when any dangerous goods are in vicinity: Please turn off your phone when you are close to a gas station or in the vicinity of any place where fuel and chemical preparations, or any other dangerous goods are stored.

In hospital: Please obey the related rules or bylaws of the hospital when using your phone in a hospital. Be sure to turn off your phone when near any medical equipment. Your use of any wireless transmission equipment, inclusive of the phone, will interfere with any medical equipment that is not protected fully, and other electronic equipment items, too. Should you have any question in this regard, please consult a related physician or medical equipment supplier.

Interference: Each and every phone's performance may be affected due to radio interference.

Professional service: The phone must be installed or repaired by no other personnel than professionals. You are likely to suffer a huge risk when you install or repair this phone by yourself, which also goes against the warranty rules.

Fittings and battery: You shall use the fittings and battery acknowledged by the phone manufacturer only. Using unauthorized accessories may tamper the warranty of the device.

Emergency call: You may enter a telephone number (112, etc.) to ask for emergency help after making sure that the phone has been turned on and is in the service status. Press the Send Key to call out.

Disclaimer: Micromax will not bear any responsibility for any incompliance with the above mentioned guidelines or improper usage of the mobile phone. Micromax keeps the right to make modifications to any of the content here in this user guide without public announcement in advance. The content of this manual may vary from the actual content displayed in the mobile phone. In such a case, the latter shall govern.

2 Introduction

2.1 Phone and Accessories

Open the packing box of the phone and check that you have the Transreceiver, Standard Charger, Standard Battery, USB Cable, Earphone, Service Guide, Driver CD, Silicon pouch and Warranty Card.

2.2 Your Phone

1	Receiver	8	Shift key- Lock/Unlock keypad
2	LCD screen	9	End key
3	Optical navigation	10	Key to Message
4	Send 1 key	11	Phonebook
5	Send 2 key	12	Earphone
6	Main menu	13	USB
7	Keypad	14	Camera
15	Lo ud speaker		

2.3 Description of Icons

The table below lists the icons that may appear on the status bar according to the current priority of the phone.

	Icons	Description
1		Indicates signal strength
2		Alarm clock is active
3		There is new message(s)
4		There is missed call(s)
5		In normal mode
6		Vibrate then ring
7		Ring
8		Vibrate
10		Ring and vibrate
11		Indicates signal strength
12		Alarm clock is active
13		There is new message(s)
14		There is missed call(s)
15		In normal mode
16		Vibrate then ring
17		Indicate the battery level
18		Keypad is locked
19		Host line 1
20		Host line 2

21		Slave line 1
22		Slave line 2
23		MMS
24		Inbox PUSH
25		GPRS

2.4 About SIM Card and the Battery

Please store the cards out of childrens reach.
The card and the contacts are vulnerable to damage due to scratching or bending. Therefore, be careful when using, inserting or removing the cards.
Be sure to switch off the phone before you insert or remove the battery or the card, otherwise, the phone may get damaged.

Inserting SIM Card

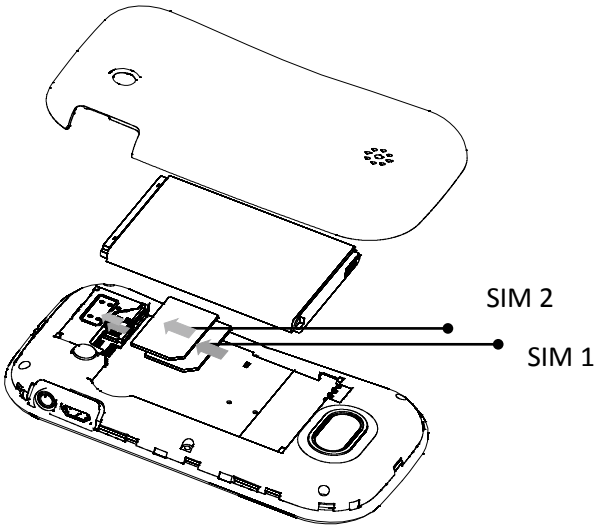

Inserting the battery

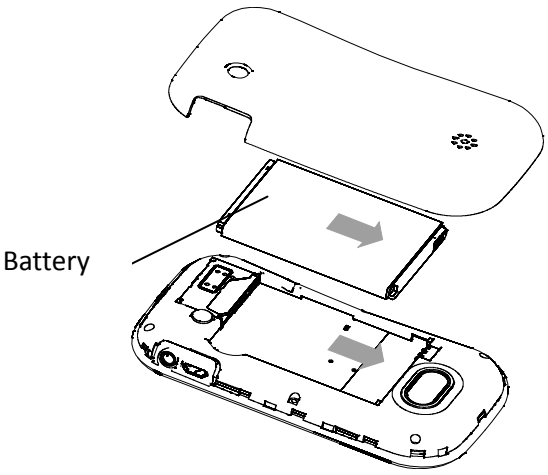

Insert the plug of the charger into the interface of the phone, and insert the charger into the power socket carefully.

Tips:
Please charge the battery before you use the newly purchased phone. We suggest you charge the battery for 4 hours continuously for the first time.
Charging when the phone is in the ON mode will not influence the normal dialing and answering, but this needs to consume power, thus the time of charging will increase.
We suggest you recharge the battery when the power is used up so as to prolong the life of the battery.

Connecting the Hands-free Kit & Charger

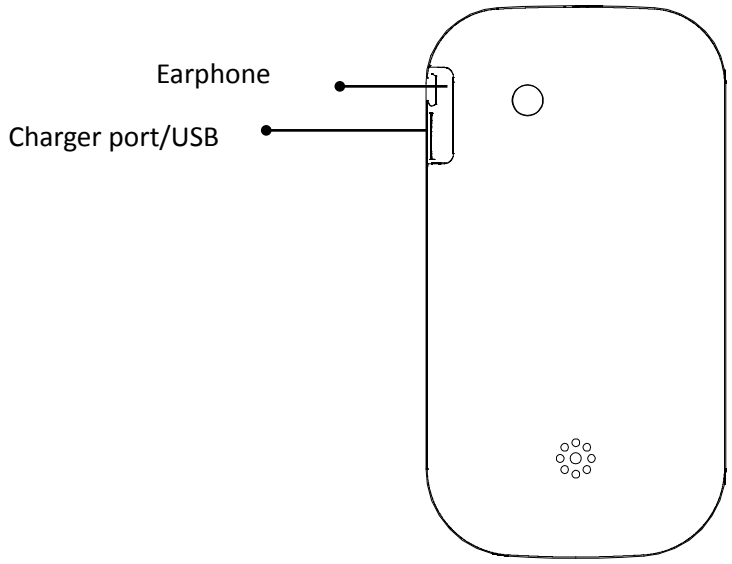

2.5 To switch ON and OFF

To switch ON: Long press the **End key** when the phone is in the OFF mode.
If the phone lock has been activated, you need to enter the 4-digit password to unlock. (The preset unlock code is 0000.)
If the SIM card has been inserted in the phone, and the related PIN code protection is activated, you need to enter the 4-8 digit password to unlock.
Warning: If you enter three wrong PIN codes in a row, the SIM card will be locked and you need to enter the PUK code to unlock. Both the PIN code and PUK code are provided by the network operator.
To switch OFF: In the standby mode, long press **End key**.

2.6 USB Cable Functions

On connecting the USB cable you can view the:
Webcam: Allows you to use your phone as a webcam
Mass storage
COM port

3 Phonebook

You can store names and phone numbers in the memory of the phone or SIM card.

Menu > Phonebook

3.1 To Add a Contact

In idle, enter phone numbers.
Options > Save > Select the location for saving
Or: **Menu > Phonebook > Add new contact >** Select the location for saving

3.2 To View a Contact

Menu>Phonebook>Options>View
In the contact list of the Phonebook, select the required name card:

3.3 Send a Message to a contact

Menu>Phonebook>Options>Send message
Allows you to send a message to the contact

3.4 To Call a contact

Menu>Phonebook>Optioms>Call

3.5 To Edit a Contact

Menu>Phonebook>Options>Edit
In the contact list of the phonebook, select the name card to be modified:

3.6 To Delete a Contact

Menu > Phonebook > Options> Delete contact
Allows you to delete the contact.

3.7 To Copy a contact

Menu>Phonebook>Options>Copy

You can copy all entries stored in the SIM card to the phone memory and vice-versa

3.8 To Move a contact

Menu>Phonebook>Options>Move

Allows you to move a contact from the SIM to the phone memory and vice-versa.

3.9 To Send a contact

Menu>Phonebook>Options>Send a contact

Allows you to send the contact via text message, mms, email and Bluetooth.

3.10 Add to Blacklist

Menu>Phonebook>Options>Add to blacklist

Allows you the contact number in Blacklist.

3.11 Caller groups

Menu > Phonebook > Options>Caller groups
Allows you to add a contact in caller groups under- friends, family, VIP, business, others.

3.12 Phonebook Settings

Menu >Phonebook> Phonebook Settings
Preferred storage- View the preferred storage in SIM1, phone or both.
Speed dial: Specify speed dial numbers to frequently used phone numbers.
My number: Edit or send your number
Extra numbers: View SIM 1-2 owner number/service dialing number/SOS number
Phonebook backup: This feature allows you to Import and Export contacts from your phone to the memory card and vice-vera.
Memory status: View used SIM/Phone memory
Copy contacts: Copy contacts from SIM to phone and vice-versa
Move contacts: Contacts from SIM to phone and vice-versa
Delete all contacts: Delete all the contacts from the phonebook.

4 Calling

4.1 To Dial from the Phonebook

Enter the **Phonebook**, select an entry from the entry list and press **Send key** to dial.
Tip: If the entry contains more than one numbers, the number selection screen will be displayed. You can select one and press **Send key** to dial.

4.2 To activate 'Mute' during a call

During a call, you can prevent the other party from hearing you:
While on call> Select ON or OFF to select or deselect the mute option.

4.3 DTMF (Dual Tone MultiFrequency) tone

During a call, you can select to turn ON or turn OFF the DTMF tone. When the DTMF tone is turned off, the digits entered will not be regarded as a DTMF signal response.

4.4 Call divert

Menu > Settings > Call settings > SIM1-2 call settings>Call divert
With the Call Divert function (needs network support), you may divert incoming calls to another mobile phone or a direct line telephone, but not to any extensions of a fixed

telephone.

4.5 Call waiting

Menu > Settings > Call settings > SIM1-2 call settings>Call Waiting
This function allows you to put the current call on hold and then answer a second one.
If, during a call, a new call comes in, you will hear a special alert sound and the screen will display the number of the new incoming call, which indicates that a third-party call is coming in.

4.6 Call Barring

Menu > Settings > Call settings > SIM1-2 call settings>Call Barring
The function is a GSM network service and can restrict outgoing and incoming calls selectively. If you need to change the settings of Restrict Calls, please contact your network operator to obtain the password for opening this service.

4.7 Conference Call

The phone supports Three-party Calling. A Three-party Calling, also called a multiparty call or a conference call, is a service based on call waiting.
The function needs the support from the local network. In some districts, you can use the function only after you apply with the local network operator. To find out more, please get in touch with your network operator.

5 Call Logs

5.1 Missed calls/dialed calls/received calls

Menu>Call Logs>SIM1-2 call logs
View: View the desired entry
Call: Call the desired entry
Send Message: To write SMS to send to the number.
Save to Phonebook: To save the number to the Phonebook
Add to blacklist: Add a number you wish to avoid/ignore under blacklist
Edit before call: To edit the number to dial or save to the phonebook.
Delete: To delete the entry.

5.2 Delete call logs

Menu>Call Logs>SIM1-2 call history>Delete SIM1-2 call logs
You may select to delete **Missed**, **Dialed, Received** or **All** calls.

5.3 SIM1-2 call timers

Menu>Call Logs>SIM1-2 call history>SIM 1-2 call timers
View SIM 1-2 call timers

5.4 SIM1-2 call cost

Menu>Call Logs>SIM1-2 call history>SIM 1-2 call cost
View SIM 1-2 call cost.

6 Messages

6.1 Write SMS

Menu > Messages > Write SMS/MMS
Write the content of the SMS
Send to: Add contact number
Input Method: select Multitap abc/Numeric/Insert Symbol
Add picture: Add a desired picture in the message you want to send as an MMS
Add sound: Add a desired sound in the message you want to send as an MMS
Add video: Add a desired video in the message you want to send as an MMS
Add subject: Add a desired subject in the MMS message
Slide Options: Allows you to add a slide 'before/after in the current mms.
Swtich to MMS: Allows you to switch from SMS to MMS, manually.
Advanced: Insert text template/Insert attachment/contact number/insert contact name (embellish the characters of text)/ Insert bookmark.
Save: Save the mms/sms
Details: View the details of the MMS/SMS

6.2 Inbox

Menu > Messages > Inbox
To read a message, move to the entry and press **OK**
When reading a SMS, you can select **Options >**
View: Allows you to view the SMS received.
Reply: Reply to the message received.
Call sender: Call on the number from which the SMS was received.
Forward: Forward the entry to others.
Delete: Delete the message.
Delete all: Delete all the messages from the Inbox.
Save to Phonebook: Allows you to save the number from which the sms was received to the phonebook.
Move to archive: Move the sms received to the archives folder
Filter by: View messages only received on SIM1/2 or view all messages together
Mark as unread: Mark a read message as 'unread'.
Reply: Allows you to reply to the SMS received.
Call Sender: Allows you to call the number from which the SMS was received.
Mark as Unread: Allows you to mark the message as 'unread'.
Advanced

- Copy to phone/SIM: Copy the SMS stored in SIM/phone to the phone/SIM.
- Move to phone/SIM**:** Move the SMS stored in SIM/phone to the phone/SIM.
- Copy all: Copy all the messages stored in SIM to the phone memory, or copy all the messages stored in the phone memory to SIM.
- Move all**:** Move all the messages stored in SIM to the phone memory, or move all the messages stored in the phone memory to SIM.

6.3 Drafts

Menu > Messages > Drafts
View: Allows you to view the SMS received.
Send: Send the message saved in drafts
Edit: Allows you to edit the SMS received.
Delete: Delete the message.
Delete all: Delete all the messages from the Inbox.

Advanced

- Copy to phone/SIM: Copy the SMS stored in SIM/phone to the phone/SIM.
- Move to phone/SIM**:** Move the SMS stored in SIM/phone to the phone/SIM.
- Copy all: Copy all the messages stored in SIM to the phone memory, or copy all the messages stored in the phone memory to SIM.
- Move all**:** Move all the messages stored in SIM to the phone memory, or move all the messages stored in the phone memory to SIM.

6.4 Outbox

Menu > Messages > Outbox
SMS that have been sent and saved are stored in Outbox.
To read a message, move to the entry and press **OK**
When reading an SMS, you can select **Options >**
View: View the message saved in **outbox**

Resend: Select how to send.
Edit: Edit the message.
Delete: Delete the message.
Delete all: Delete all the messages from the Inbox.
Advanced
- Copy to phone/SIM: Copy the SMS stored in SIM/phone to the phone/SIM.
- Move to phone/SIM**:** Move the SMS stored in SIM/phone to the phone/SIM.
- Copy all: Copy all the messages stored in SIM to the phone memory, or copy all the messages stored in the phone memory to SIM.
- Move all**:** Move all the messages stored in SIM to the phone memory, or move all the messages stored in the phone memory to SIM.

6.5 Sent Messages

Menu > Messages > Sent messages
View: View sent messages.
Forward: Forward the sent messages
Delete: Delete a message in the sent items folder
Delete All: Delete all messages in the sent items folder
Advanced
- Copy to phone/SIM: Copy the SMS stored in SIM/phone to the phone/SIM.
- Move to phone/SIM**:** Move the SMS stored in SIM/phone to the phone/SIM.
- Copy all: Copy all the messages stored in SIM to the phone memory, or copy all the messages stored in the phone memory to SIM.
- Move all**:** Move all the messages stored in SIM to the phone memory, or move all the messages stored in the phone memory to SIM.

6.6 Archive

Menu>Messages>Archive
Allows you to save messages received in your inbox into this **archive** folder.

6.7 Delete Messages

Menu>Messages>Delete messages
Delete messages from the following folders:
Inbox, Drafts, Outbox, Sent messages, Archive, All messages

6.8 Templates

Menu>Messages>Templates>SMS Templates/MMS Templates
The phone has preset frequently used phrases which may be selected and added to the text when you are editing SMS. Preset phrases may be modified.

6.9 Message settings

Menu>Messages>Messages settings
SMS Settings
Menu>Messages>Message settings>SMS settings
- Profile settings-

•Voicemail server
•Common settings- Set to receive Delivery reports, Reply path, Save Sent message.
•Memory status
•Prefereed storage

MMS Settings
Menu>Messages>Message settings>MMS settings
•Profiles- Select a profile from the available network profiles.
•Common setting

6.10 EMAIL

E-Mail
Before use, you need to set the e-mail in the "E-mail accounts" menu. Via this menu, you can receive and send e-mail.

- Send and Receive: You can send/receive the e-mail from the specified mailbox.
- Write Email: You can edit e-mails.
- Inbox: You can see the received e-mails.
- Outbox: You can see the sent e-mails.
- Sent: You can view send e-mails.
- Drafts: You can see the drafts in the specified mailbox.
- Clear mailbox: You can clear the e-mails in the specified mailbox, including inbox, outbox, sent e-mail backup and drafts, or clear all e-mails.
- Delete marked emails: You can change the status of all e-mails to deleting status.
- Email accounts: You can set up you new account.
- Templates: you can pre-edit some common phrases, which is convenient for quick editing.
  - Incoming Server: You can set the server parameters for the received e-mails, including Incoming server, Incoming port, user name and password etc.
  - Signature: You can set it On or Off and edit the signature.

The first step in using email on your mobile phone is to define your email account's settings so that your mobile phone knows which server to contact and to login using the correct credentials.

TO CONFIGURE A NEW EMAIL ACCOUNT:

Go to:

• Email >Email accounts> Options >New Account> Start to create account >Email address >Options >Next > Select email protocol ('POP3' or 'IMAP- as per the account settings).

• Next >Select Data account (as per the SIM connection) > Incoming Server (edit email incoming server as per the account standard settings).

• Next > Outgoing Server (edit email outgoing server as per the account standard settings) >User Name > Password > Account Name > Options > Done (email account is created)

• Go to- Created email account >Options > Edit (user can edit email account settings if required)
• Advance Settings > Outgoing Sever > Outgoing Port (Input correct outgoing port according to the email configuration).

• Advance Settings > Incoming Server > Incoming Port (Input correct incoming port according to the email configuration)

• Go to- Configured email account > Options > Activate
Your email account is now created!

6.11 Broadcast Message

Menu > Messages > Broadcast Message

The phone supports Broadcast Message. It is supported by GSM network. Broadcast messages are single-way messages sent to the users of the network operators by the message service center. For the contents and channel setup of broadcast messages, consult your network operator.

7 Settings

7.1 Customized Phone & Call Settings

Functions	Description
Set time and date	**Menu > Settings > Phone settings > Time and date**
Schedule power on/off	**Menu > Settings > Phone settings > Schedule power on/off** To disable and enable status; to activate/deactivate, switch on/off, and time in turn.
Select language	**Menu > Settings > Phone settings > Language**
Preferred Input	**Menu > Settings > Phone settings >Preferred input**
Trackpad sensitivity	**Menu > Settings > Phone settings >Trackpad sensitivity**
Set Display setup	**Menu > Settings > Phone settings > Display Setup >** Wallpaper/Screen saver/Show date and time/LCD backlight/ Show owner number/Standby theme.
Set Greeting text	**Menu > Settings > Phone settings > Greeting Text**
Dedicated key	**Menu > Settings > Phone settings > Dedicated key** **UP>** Music Player **Down>**Write message **Left>** Alarm **Right>**Calendar
Specify the Shortcut key	**Menu > Settings > Phone settings >Shortcut key**
Auto update of date and time On/Off	**Menu > Settings > Phone settings > Auto update of date and time**
Caller ID- Set by Network	**Menu > Settings > Call settings > SIM1/2 call settings>Caller ID**
Set Call waiting	**Menu > Settings > Call settings > SIM1-2 call settings>Call waiting**
Set call Divert	**Menu > Settings > Call settings > SIM1-2 call settings> Call Divert Tip:** You can select **Cancel all divert** to cancel all the divert settings.
Set Call Barring	**Menu > Settings > Call settings > SIM1-2 call settings> Call Barring.** Restrict Calls is a GSM network service. Please contact your network operator to obtain the password for opening this service.
Set the black list	**Menu > Settings > Call settings > Advance settings>Blacklist**
Reject by SMS	**Menu > Settings > Call settings > Advance settings>Reject by SMS** Reject a call by SMS
Select network	**Menu > Settings > Network settings >SIM 1-2 network settings** **New Search:** The phone will select a new network automatically. **Select Network:** The phone will search and display the list of known networks for you to select the desired one, after which, the phone will try to log in the selected network. If the selected network is registered successfully, it will prompt so. **Select preferred network**: To switch search methods.

Set information of GPRS Connection	**Menu > Connectivity> Data account>GPRS/GSM Data**
Restore factory default	**Menu > Settings > Restore factory settings** **Tip:** You need to enter the phone password when you want to restore factory default. The preset phone password is **0000**. Please bear your password in mind. Incase you forget it, contact the local dealer or an authorized service center.

7.2 Profile Setup

Functions	Description
Activate the profile mode	**Menu > Settings> User profiles >** Desired mode**>Options > Activate**
Activate 'vibration mode' in idle condition	**Long press the $ key on your keypad to activate the vibration mode**
Set the ringtone for incoming calls	**Menu > Settings > User profiles > Customize> Tone setup> SIM1-2 Incoming call**
Set the ringtone for messages	**Menu > Settings > User profiles > Customize> Tone setup> SIM1-2 message tone**
Set the ringtone for key pad tone	**Menu > Settings > User profiles > Customize> Tone setup> Keypad tone**
Adjust the volume of Ring Tone / Key Tone	**Menu > User profiles >Customize> Volume**
Set Alert Type of ringing	**Menu>User profiles> Customize >Alert type**
Set the ring type	**Menu > User profiles > Customize> Ring type**
Set the Extra Tone	**Menu > User profiles > Customize> Extra tone**
Set the answer mode	**Menu > User profiles > Customize> Answer mode**

7.3 Security Settings

Functions	**Description**
PIN code request	**Menu > Settings > Security settings> SIM1-2 security settings>SIM 1-2 lock** **Warning:** If you enter three wrong PIN codes in a row, you need to enter the PUK code to unlock. PIN code and PUK code are provided by the network operator.
Phone lock	**Menu > Settings > Security settings > Phone lock** The preset password is **0000**
Auto keypad lock	**Menu > Settings > Security settings> Auto keypad lock >** Select the time for the auto keylock. Note: Long press the ⇧ key on your keypad to lock/unlock the phone.
Change password	**Menu > Settings > Security Center> SIM1Security setup > Change password**

8 Entertainment &Multimedia

8.1 Camera

Menu > Camera:
When the camera is activated, the phone enters the view finding status.
On the view finding screen, press **Ok Key** to capture.
Before you beging thevideo shooting, you can set the following to modify camera settings. Select **Options >**
Photos: View the images clicked.
Camera settings: Set EV, Banding, delay timer, shutter sound, contrast and cont. shot,
Image settings: Set the size and quality of photos.
White balance: Set White Balance.
Scene mode: Set scene mode.
Effect settings: Set the special effects of photos, such as Grayscale, Sepia, Sepia Green and Colour Invert.
Storage: Select phone or memory card.
Restore default: Restore default settings.

8.2 Audio Player

Menu > Audio player

To add songs in your phone either add them from the phone memory or select the memory card by going to - **Music player>Settings>Player settings> Pre playlist (Phone/Memory card)**

SRS WOW HD: Is a sound effect control software that allows you to add a variety of effects like: Bass, Treble, Blue, Classical, Hip Hop, Jazz, Voice, Rock- to your songs
Playlists: Allows you to make a playlist and add songs in it either from the phone memory or the memory card.
All tracks: Allows you to view all the tracks
Recently played: View a list of the recently played songs
Most played: View the most played songs.
Recently added: View the list of recently added songs
Artists: Add the artist name
Albums: Add the album name
Genres: Add a genre/type to your songs
Refresh list: Refresh the playlist
Settings:
- Player settings
- Display settings
- Sound effects

8.3 FM Radio

Menu > FM radio
Edit the channel list manually

Options > Channel list
OK > Edit

Edit the channel list automatically
Options > Auto search

Play on the background play
Options > Settings
Set the function **On** or **Off**.

Listen in by Loud Speaker
Options > Settings
Set the speaker **On or Off**.

8.4 Image Viewer

Menu > Multimedia> Image viewer
Or on the view finding screen, select **Options > Photos**
On the Image viewer list screen, select **Options>**
View: View the highlighted photo.
Edit: Edit the image
Browse style: Select the style of viewing.
Send: Send the photo by MMS or Bluetooth, Email
Use as: Set the highlighted photo as wallpaper, screen saver, or the photo caller ID of a Phonebook entry.
Rename: Rename the highlighted file.
Delete: Delete the highlighted file.
Delete all files: Delete all the files from the list.
Sort by: Sort the files in the list.
Storage: Select phone or memory card.

8.5 Video Recorder

Menu > Multimedia> Video recorder
Press the center button to start & pause recording. Before recording, you can set the following as needed. Select **Options >**

Camcorder settings: set White Balance, EV, Night Mode and Banding.
Video settings: Set video settings as per your requirement
White balance: Set white balance
Video settings: Set the Video Quality, File size limit, Rec time limit, and record audio.
Effect settings: Set the special effects, such as Grayscale, Sepia, and Sepia Green etc.
Restore default: Restore default settings.

8.6 Video Player

Menu > Multimedia > Video player
Or, on the view finding screen, select **Options > To player**
The phone will automatically read the entries with the format supported by the phone under

the folder **Videos** of the **File manager** and display a list of entries. If there is no entry, the list is blank.
On the video player list screen, select **Options >**
Play: Enter the play screen of the highlighted file. Select **center Key** to begin/pause playing; press **Navigation key (Up/Down)** to adjust the speed, press **Navigation key (Left/Right)** to adjust the progress.
Send: Send the video by MMS or Bluetooth.
Rename: Rename the highlighted file.
Delete: Delete the highlighted file.
Delete all files: Delete all the files from the list.
Sort by: Sort the files in the list.
Streaming URL: Allows you to browse sites like Youtube, Google.
This feature is a network dependant service.
Profile: Choose and activae a desired profile.
Storage: Select phone or memory card.

8.7 Photo editor

Menu>Multimedia>Photo editor
Allows you to resize the images stored in your phone

8.8 Sound Recorder

Menu > Multimedia > Sound recorder
On the Sound Recorder list screen, you can select:
Play: Play the recorded sound
Append: Add a sound
Rename: Rename the highlighted recording.
Delete: Delete the highlighted recording.
Delete all files: Delete all the recordings from the list.
Use as: Send the highlighted record to the ringtone list for profiles.
Send: Send the highlighted record by MMS, Bluetooth or Email.

8.9 Slide show

Menu>Fun & Games>Slide show
Allows you to view images as a slide show.

8.10 Fun & Games

Menu >Fun & Games> Games
Choose from a list of available games in your handset and play to cross various levels and increase your scores!

9 Bluetooth

Tip:
You can connect wirelessly to other compatible device with Bluetooth technology. Compatible devices may include computers, mobile phones. You can use Bluetooth connectivity to send images, music and sound clips, video clips, and notes.

Since devices with Bluetooth wireless technology communicate using radio waves, your device and the other devices need to be within a range of 10 meters from each other, but the connection may be subject to interference or could face obstruction from stuff such as wall or from other electronic devices. Use the wireless technology of bluetooth to be able to consume battery quantity of electric charge. If you are restricted by something when using bluetooth technology, consult your local Micromax support/service station.

9.1 To Activate/Deactivate Bluetooth Connectivity

Menu > Connectivity >Bluetooth > Power (On/Off)

9.2 Visibility

Menu > Connectivity> Bluetooth > Visibility
Switch ON/OFF the visibility of your device

9.3 To Search/Inquire Audio Device

Menu > Connectivity> Bluetooth > Inquiry audio device
Tip: Please activate the Bluetooth first.

9.4 To Search My (new) device

Menu > Connectivity> Bluetooth > My device > Inquiry new device
Tip: Please activate the Bluetooth first.

9.5 My Name

Menu > Connectivity> Bluetooth > My name
Choose a display name for your Bluetooth connectivity. The same will be shown to others when you connect via Bluetooth.

9.6 Advanced

Menu > Connectivity> Bluetooth > Advanced
View and edit functions from the list below:
Audio Path- Forward to Bluetooth headset or leave the audio in the phone
Storage-Choose to store in the phone or SIM memory
Sharing permission- Choose from Full control or Read only.
My address- View the Bluetooth address

10 Organizer & Applications

Functions	Description
View the calendar	**Menu > Organizer > Calendar**
Task	**Menu>Organizer>Task**
Alarm	**Menu > Organizer > Alarm > Edit**
World clock	**Menu > Organizer > World clock**

Notes	**Menu > Organizer > Notes**
Synchronization	**Menu > Application > Synchronization** The user can surf a website which allows him to create a backup for the phonebook & calendar on its server. By using this feature the user can sync changes automatically for the phonebook & calendar whenever required.
Stopwatch	**Menu > Application > Stopwatch > Typical stopwatch > Split timing/Lap timing / View record**
Phone Sync	**Menu > Application> Phone sync**
Calculator	**Menu > Application > Calculator**
Unit converter	**Menu > Application> Unit converter**
Currency converter	**Menu > Application> Currency converter** Input the exchange rate and Press **OK**. Select the exchange rate, input the figure and press **OK.**
Text Reader	**Menu > Application > Text reader**

11 File Manager

When an USB cable is connected, you can use the phone as a USB mass storage.

Functions	Description
View folders	**Menu > File manager> Options > Open**
Format	**Menu > File manager > Options > Format** **Tip:** The Format function will delete the data you have created and saved. Please back up important data and keep them properly.

.

12 WAP Services & JAVA

12.1 WAP Browser

Menu > Connectivity > WAP
You need to make the relevant settings in WAP Setup before you use the WAP browser to surf the web.
When the WAP browser is activated, if a homepage is set in WAP Setup, the phone will link the website indicated by the homepage; otherwise, you may enter a website and the phone will connect to it.

When surfing the web, select **Options >**

Refresh: To refresh the web page.
Homepage: To link the homepage.
Input URL: input a website address.
Add Bookmark: Add to bookmark.
Set Homepage: set the URL as homepage.
Forward/Backward: To turn to the next /previous page.
Advance: Show URL info, Bookmark, Save item.
Exit: To exit the browser.

12.2 WAP Setup

WAP settings are required for surfing the web with WAP. Follow the steps below to set up a WAP account:

- Connectivity > Data Account > GPRS > Add account > Add account name/ APN/ Username & password > Save.

Then go to:
- Menu >Connectivity > WAP >Settings > Profiles > Add new > Account Name/ Homepage/ Data Account (select the previously created data account) > Select connection type (HTTP/WAP- Indise HTTP & WAP ener the correct proxy address & port > Done > Save the account >Go to the created account & activate.

Menu > Connectivity> WAP> Settings>Profile
You can set the following:
Account: To select from the GPRS connection list.
Connection type: To set WAP or HTTP connection mode.
Home page: To set the address of the homepage. The phone has a default and you can modify it.

12.3 Java

Menu >Applications> Java
You can install Java applications to make your phone more fun and entertaining. It also allows you to connect to Snaptu, Nimbuzz and Operamini as well.

13 STK

13.1 STK Services

If your SIM card supports STK, you may use the corresponding value-added services.
Menu > Connectivity

14 Inputting Text

You can enter text in English langauge.

15 Maintenance

Use a dry soft cloth to wipe general dirt.
Do not use a hard cloth, benzene or thinner to wipe the phone, otherwise, the surface of the phone will be scratched or could even result in the fading of colour.

16 Taking Care of your Device

- Your device is a product of superior design and craftsmanship and should be handled with care: The following suggestions will help you protect your phone:
- Always keep the small parts of the phone away from children.
- Keep the device dry. Precipitation, humidity, and all types of liquids or moisture can contain minerals that will rust electronic circuits. If your device does get wet, remove the battery, and allow the device to dry completely before replacing it.
- Do not use or store the device in dusty, dirty areas. Its moving parts and electronic components can be damaged.
- Do not store the device in high or cold temperature. High temperatures can shorten the life of electronic devices and damage batteries.
- Do not attempt to open the device other than as instructed in this guide.
- Do not drop, knock, or shake the device. Rough handling can break internal circuit boards and fine mechanics.
- Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the device. Only use a soft, clean, dry cloth to clean the surface of the device.
- Do not paint the device. Paint can clog the moving parts and prevent proper operation.
- Use chargers indoors

17 After Services

For details, see the After Service Guide supplied with the phone.